








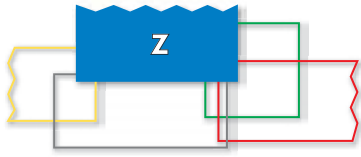


M ISO DIN 13

HSSE



|  | | | | | | | | | Z462V-3 | Z462V-3 | Z462VS-3 | Z470VS-3 |
|--|---------|-------------|-------------|----------------|-----------|----|--|-------|--|----------|----------|----------|
| Z462V-3  | | | | | | | | |  | | | |
| Z462VS-3  | | | | | | | | |  NEW | | | |
| Z470VS-3  | | | | | | | | |  PM | | | |
|  | | | | | | | | |  | | | |
| | | | | | | | | |  | | | |
| $\varnothing d_1$ M | P mm | l_1 mm | l_2 mm | d_2 mm | a mm | | | ID | ID | ID | ID | |
| 12 | 1.75 | 110 | 14.0 | 9.0 | 7.0 | *3 | | 10.20 | 104742 | * 146305 | 111510 | |
| 14 | 2.00 | 110 | 14.0 | 11.0 | 9.0 | *3 | | 12.00 | 104743 | | 148169 | |
| 16 | 2.00 | 110 | 18.0 | 12.0 | 9.0 | *3 | | 14.00 | 104744 | | 111511 | |
| 18 | 2.50 | 125 | 21.0 | 14.0 | 11.0 | 3 | | 15.50 | 104745 | | | |
| 20 | 2.50 | 140 | 24.0 | 16.0 | 12.0 | *3 | | 17.50 | 104746 | | 111512 | |
| 22 | 2.50 | 140 | 24.0 | 18.0 | 14.5 | 3 | | 19.50 | 104752 | | | |
| 24 | 3.00 | 160 | 27.0 | 18.0 | 14.5 | 4 | | 21.00 | 104747 | | 111620 | |
| 27 | 3.00 | 160 | 27.0 | 20.0 | 16.0 | 4 | | 24.00 | 104748 | | | |
| 30 | 3.50 | 180 | 30.0 | 22.0 | 18.0 | 4 | | 26.50 | 104749 | | | |
| 36 | 4.00 | 200 | 36.0 | 28.0 | 22.0 | 4 | | 32.00 | 104750 | | | |
| 42 | 4.50 | 200 | 40.0 | 32.0 | 24.0 | 4 | | 37.50 | 104751 | | | |
| * Z462VS-3 = | | | | | | | | | | | | |
| $\varnothing d_1$ M | P mm | l_1 mm | l_2 mm | d_2 h6 mm | a mm | | | ID | | | | |
| 12 | 1.75 | 110 | 14.0 | *10.0 | *8.0 | 4 | | 10.20 | | | | |
| 14 | 2.00 | 110 | 14.0 | *12.0 | *9.0 | 4 | | 12.00 | | | | |
| 16 | 2.00 | 110 | 18.0 | 12.0 | 9.0 | 4 | | 14.00 | | | | |
| 20 | 2.50 | 140 | 24.0 | 16.0 | 12.0 | 4 | | 17.50 | | | | |
| 24 | 3.00 | 160 | 27.0 | 16.0 | 12.0 | 4 | | 21.00 | | | | |
| * Norme DC / * DC Norm / * Norma DC | | | | | | | | | | | | |